

# TRAÇABILITE INDUSTRIELLE

C h e c k   &   S e c u r e

**Fitelec**  
Production  
*Check & Secure*

**DATALOGIC**  
THE VISION IS YOURS

Lecteur laser DS 2100 N



56484



IDENTIFICATION

The DS2100N is the ideal compact laser bar code scanner with complete connectivity and communication options for close reading applications.

The DS2100N is available in distinct models offering on-board PROFINET, EtherNet/IP, and Ethernet TCP/IP communication protocols. With on-board Ethernet ports and switch capability, the DS2400N can be networked into PROFINET line or ring topologies for system redundancy. With EDS-AOP setup tools, configuring the EtherNet/IP fieldbus communication is simple and easy. Through PROFINET, the DS2400N can be configured via the modular structure contained in the GSDML file. Parameters are stored in the GSDML file, providing automatic configuration for failed or replaced devices.

With an innovative rotating connector block, the DS2100N minimizes its mechanical dimensions offering a flexible form factor during installation.

Embedded switches, dual PROFINET parts, and a rotating connector block are a few of the unique features that define the Datalogic DS2x00N family. Additionally, innovative software features provide easy and simple scanner installation and replacement.

The DS2100N is equipped with the latest generation microprocessor powering an improved code reconstruction algorithm delivering superior performance on low quality codes or damaged labels.



## HIGHLIGHTS

- Embedded Ethernet connectivity
- Two PROFINET Ports
- Embedded Ethernet Switch
- Line topology
- Rotating connector block
- Compact dimensions
- Installation flexibility and optimum form factor
- ACR: Advanced Code Reconstruction
- Excellent performance on low quality and damaged labels
- Up to to a 300 mm (11.8in.) reading distance

## APPLICATIONS


- Automatic warehouses
- Factory automation
- Automatic picking systems
- Process control and packaging
- Print & apply systems

## TECHNICAL DATA


INDUSTRIAL LASER BARCODE SCANNERS	DS2100N-12XX	DS2100N-13XX	DS2100N-14XX
<b>Reading Distance (Min / Max)</b>		<b>50 - 300 mm (1.97 - 11.81 in)</b>	
<b>Max Resolution</b>		<b>up to 0.12mm (5 mils)</b>	
<b>Scan Rate</b>		<b>500 - 1000 scans/s</b>	
<b>Scan Pattern Type</b>		<b>Linear / Raster</b>	
<b>Aperture Angle</b>		<b>60 degrees</b>	
<b>Multilabel Reading</b>		<b>Up to 10 Codes in the same reading phase</b>	
<b>Reconstruction Code Technology</b>		<b>ACR Advanced Code Reconstruction</b>	
<b>Readable Codes</b>		<b>Code 12of5, Code39, Code93, Code128, EAN/UPC, EAN128, Codabar, Pharmacode, Plessey, ISBT128</b>	
<b>Case Material</b>		<b>Aluminum</b>	
<b>Dimensions (Typical Value)</b>	<b>84 x 68 x 34 mm (3.3 x 2.7 x 1.3 in)</b>	<b>104 x 69 x 38 mm (4.1 x 2.7 x 1.5 in)</b>	<b>104 x 86 x 38 mm (4.1 x 3.4 x 1.5 in)</b>
<b>Weight</b>	<b>330g ( 11.64 oz)</b>	<b>281 g (10 oz.)</b>	<b>308 g (10.9 oz.)</b>
<b>Temperature Range</b>		<b>0° - 45 °C (32 - 113 °F)</b>	
<b>Voltage Supply/Power Consumption</b>		<b>10-30 VDC; 4 W (average)</b>	
<b>IP Rating</b>		<b>IP65</b>	
<b>Embedded Communication Interfaces</b>	<b>Main port RS232/RS422/RS485 Auxiliary port RS232 IN-NET RS485 multidrop</b>	<b>EtherNet/IP, Ethernet TCP/IP Main port RS232/RS422/RS485 Auxiliary port RS232 IN-NET RS485 multidrop</b>	<b>PROFINET, Ethernet TC/PIIP</b>
<b>Digital Inputs</b>	<b>2 Input (optocoupled, NPN/PNP)</b>	<b>2 Input (optocoupled, NPN/PNP)</b>	<b>Not Applicable / Via PROFINET Fieldbus</b>
<b>Digital Outputs</b>	<b>2 Outputs (optocoupled)</b>	<b>2 Outputs (non-optocoupled)</b>	<b>Not Applicable / Via PROFINET Fieldbus</b>
<b>Id-Net™ Interface</b>			
<b>Fieldbus</b>	<b>✓ with CBX, QLM external devices</b>	<b>Embedded EtherNet/IP / compatible with CBX, QLM external devices</b>	<b>Embedded PROFINET with internal switch (2 Ports)</b>
<b>EtherNet</b>	<b>✓ with CBX, QLM external devices</b>	<b>Embedded Ethernet TCP-IP / compatible with CBX, QLM external devices</b>	<b>Embedded PROFINET with internal switch (2 Ports)</b>
<b>Xpress Interface™</b>			
<b>Device Programming</b>		<b>Genius™ (Windows™ based) SW</b>	

## ACCESSORIES

ACCESSORY	DESCRIPTION	PN
<b>OM2000N</b>	<b>Oscillating Mirror</b>	<b>93ACC1783</b>
<b>GFC-200</b>	<b>85° Contact Reading Mirror</b>	<b>93A201108</b>
<b>GFC-2100</b>	<b>2KN 90° Lateral Output Window</b>	<b>93A201000</b>
<b>GFC-2020</b>	<b>102° Lateral Output Mirror</b>	<b>93ACC1871</b>

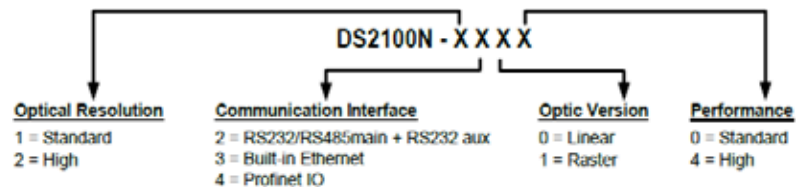

## DIMENSIONS

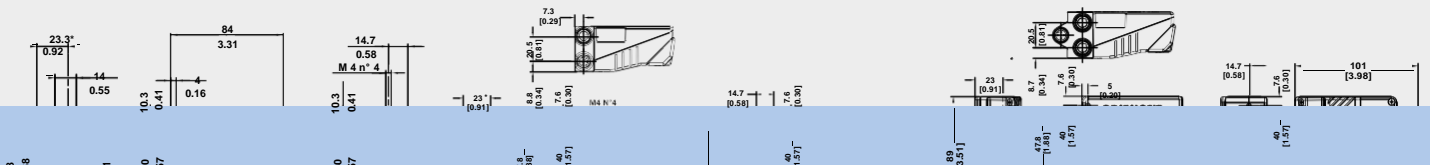

## READING DIAGRAMS



The company endeavours to continuously improve and renew its products; for this reason the technical data and contents of this catalogue may undergo variations without prior notice. For correct installation and use, the company can guarantee only the data indicated in the instruction manual supplied with the products. Product and Company names and logos referenced may be either trademarks or registered trademarks of their respective companies. We reserve the right to make modifications and improvements.

Rev. 02, 11/2014

# L'identification automatique fiabilisée



## Check & Secure

*Programmes applicatifs dédiés au contrôle et sécurisation de l'identification*



## Systèmes d'identification

*Imprimantes, Etiquetage automatique, Logiciels, Lecture 1D/2D, RFID*



## Assistance & services

*Accompagnement de vos projets et maintenance de vos installations*



## Etiquettes techniques

*Conception et fabrication d'étiquettes, standards et transfert thermique*

**Fitelec**  
Production

*Check & Secure*

[www.fitelec.fr](http://www.fitelec.fr)



4, rue d'Anjou  
76240 Le Mesnil-Esnard

Tel 02 35 804 804

Fax 02 35 804 814